



# 角形永磁夾盤 Rectangular Permanent Magnetic Chuck

## RMT

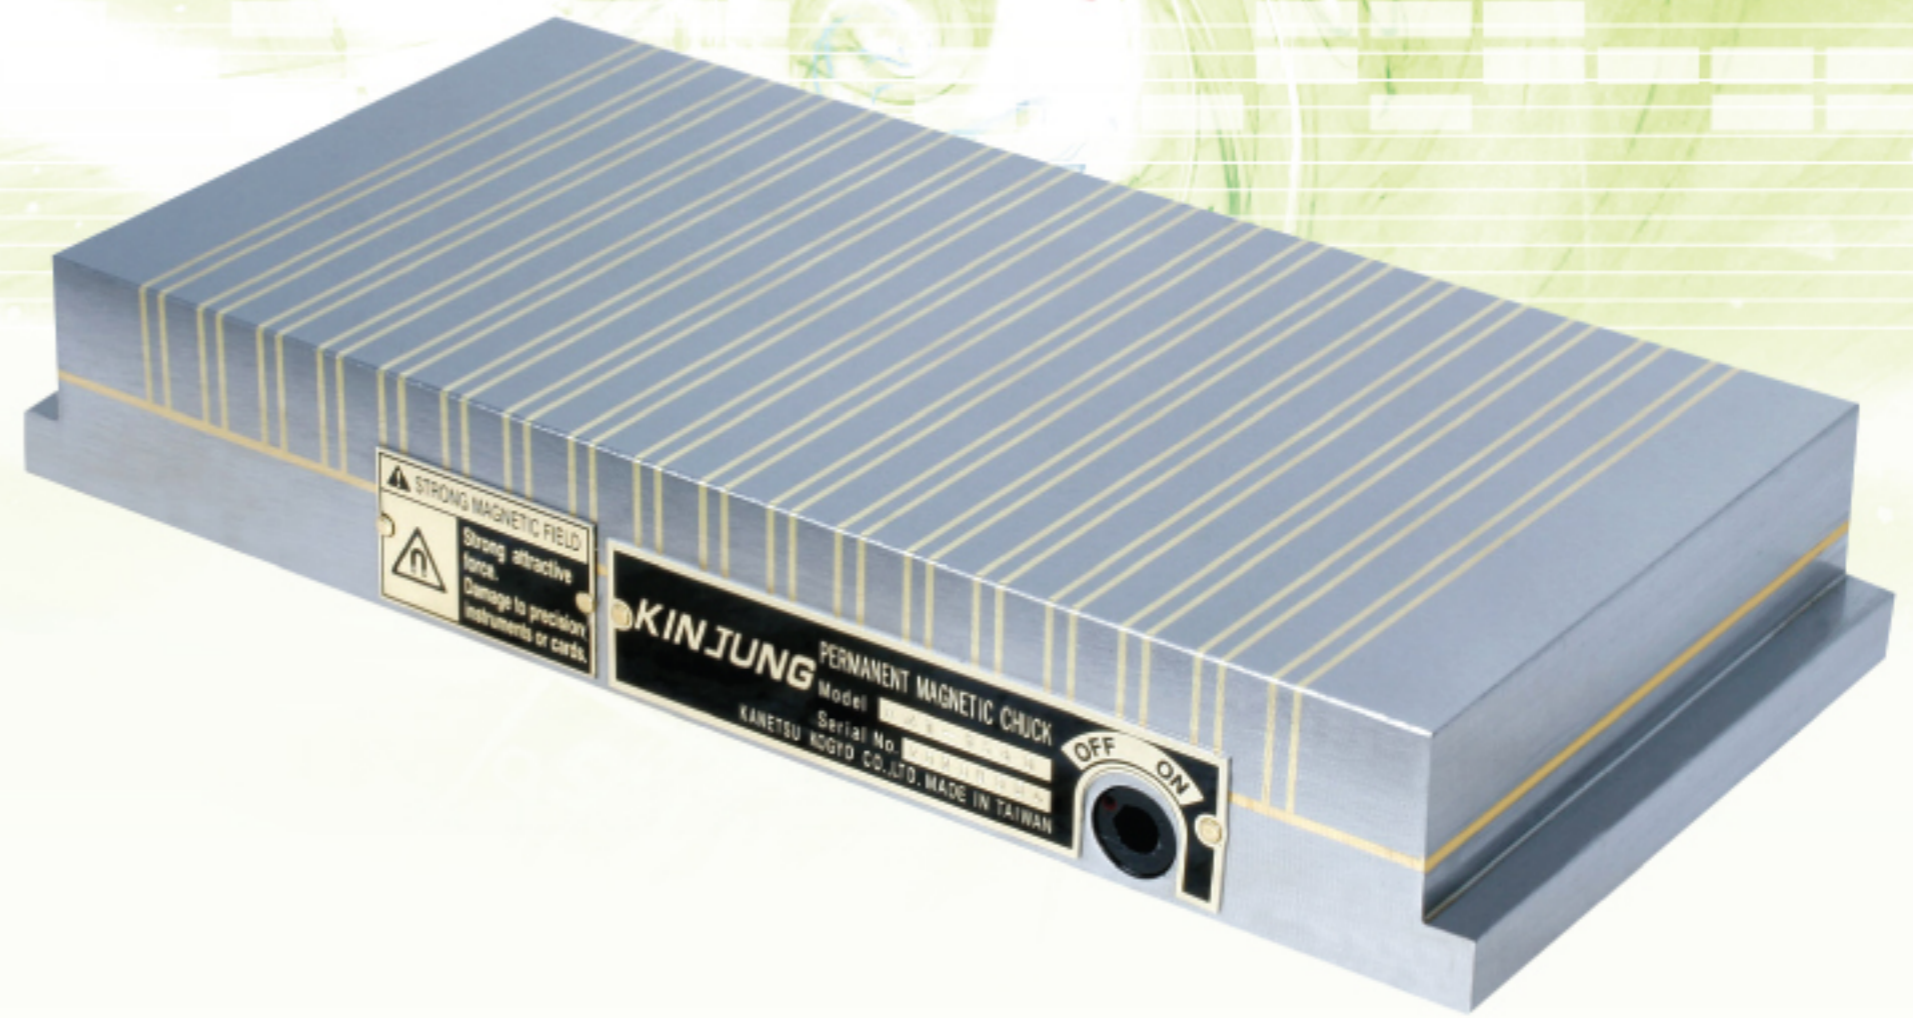

鐘通工業股份有限公司  
KANETSU KOGYO CO., LTD.

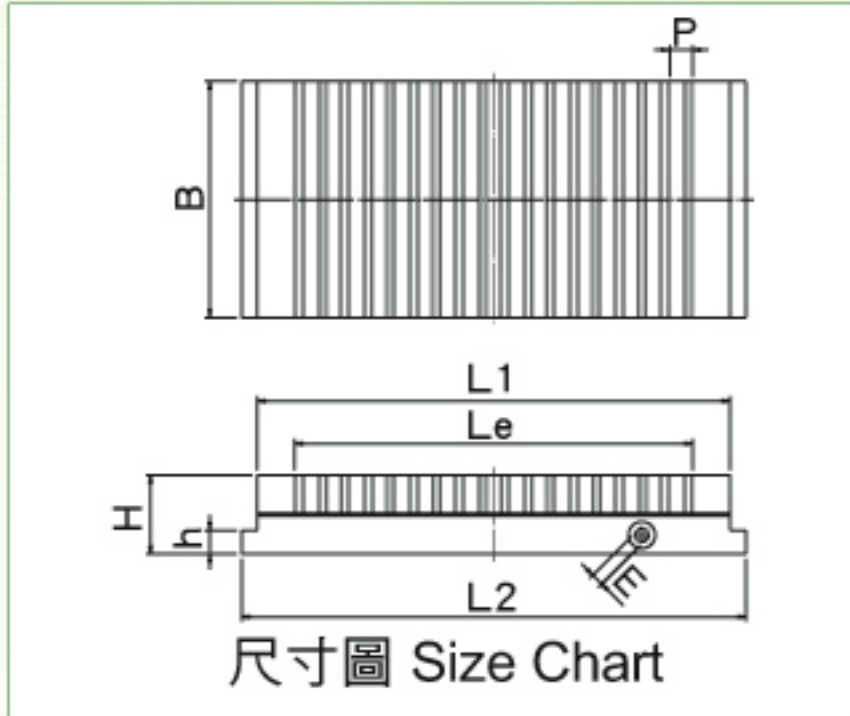

永磁夾盤  
Permanent Magnetic Chuck

8

### 用途:

重磨削，輕切削作業，均可使用，角形永磁夾盤，在液體中亦可使用。

### 特性:

- 重量較輕，厚度薄。
- 本永磁夾盤具有堅固的本體，而由於這剛性它能有高精度的作業面。
- 工件無論厚薄均可適用。

### Application:

It is suitable to the heavy grinding and light cutting operations. It also can be operated in liquid.

### Features:

- It is lighter and thinner.
- This type of permanent magnetic chuck has rigid body structure and it provides a high precision chucking face.
- The chuck is suitable for any process, whether the workpiece is thin or thick.

### 規格表 Specification Table

mm

型式 Model	尺寸 Nominal Dimension	夾盤作業面 Chucking Face			磁極間隔 Pole Pitch P	夾盤基準面 Chuck Mounting Part			高度 Height H	六角孔 Hexagonal Handle hole E	重量 Weight
		B	L1	Le		B	L2	h			
RMT-1018	100×175	100	175	137	14.5(1.5+3.2+1.5+8.3)	100	195	15	50	8	7.0Kg
RMT-1025	100×250	100	250	210	14.5(1.5+3.2+1.5+8.3)	100	270	15	50	8	9.5Kg
RMT-1030	100×300	100	300	253	14.5(1.5+3.2+1.5+8.3)	100	320	15	50	8	11.5Kg
RMT-1325	125×250	125	250	210	14.5(1.5+3.2+1.5+8.3)	125	270	15	50	8	12.0Kg
RMT-1515	150×150	150	150	108	14.5(1.5+3.2+1.5+8.3)	150	170	15	50	8	8.5Kg
RMT-1530	150×300	150	300	253	14.5(1.5+3.2+1.5+8.3)	150	320	15	50	8	17.0Kg
RMT-1535	150×350	150	350	296	14.5(1.5+3.2+1.5+8.3)	150	370	15	50	8	20.0Kg
RMT-1545	150×450	150	450	354	14.5(1.5+3.2+1.5+8.3)	150	470	15	50	8	25.0Kg
RMT-2035	200×350	200	350	296	14.5(1.5+3.2+1.5+8.3)	200	370	15	50	8	26.0Kg
RMT-2040	200×400	200	400	354	14.5(1.5+3.2+1.5+8.3)	200	420	15	50	8	30.0Kg
RMT-2045	200×450	200	450	398	14.5(1.5+3.2+1.5+8.3)	200	470	15	50	8	33.0Kg
RMT-2050	200×500	200	500	441	14.5(1.5+3.2+1.5+8.3)	200	520	15	50	8	37.0Kg
RMT-2060	200×600	200	600	543	14.5(1.5+3.2+1.5+8.3)	200	620	15	50	8	45.0Kg

鐘通工業股份有限公司保有隨技術發展而衍生修改的權利。  
KANETSU KOGYO CO., LTD. reserve the right to bring up any modification connected with the technological development.