



# Standard Electro-Permanent Magnetic Chuck

## KEPT-K

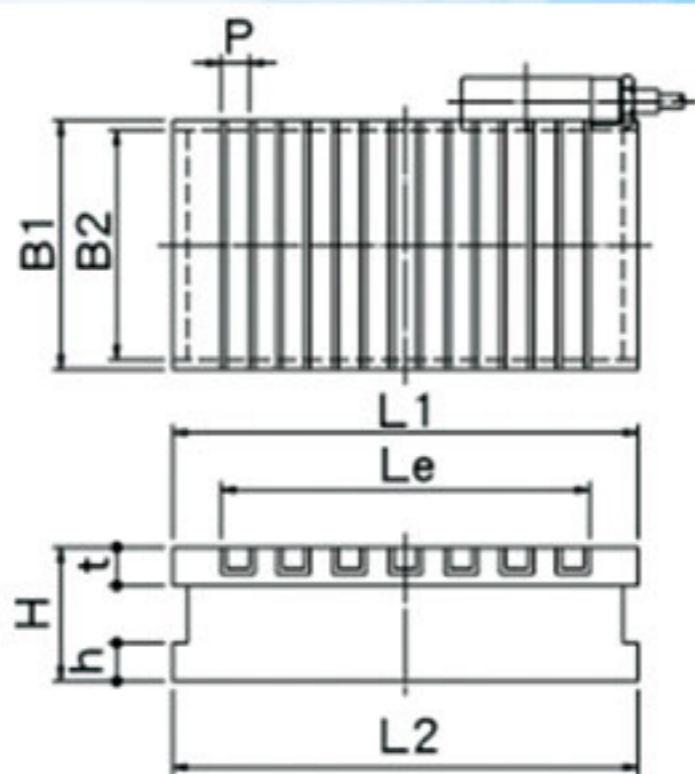

▲ 尺寸圖 Size Chart

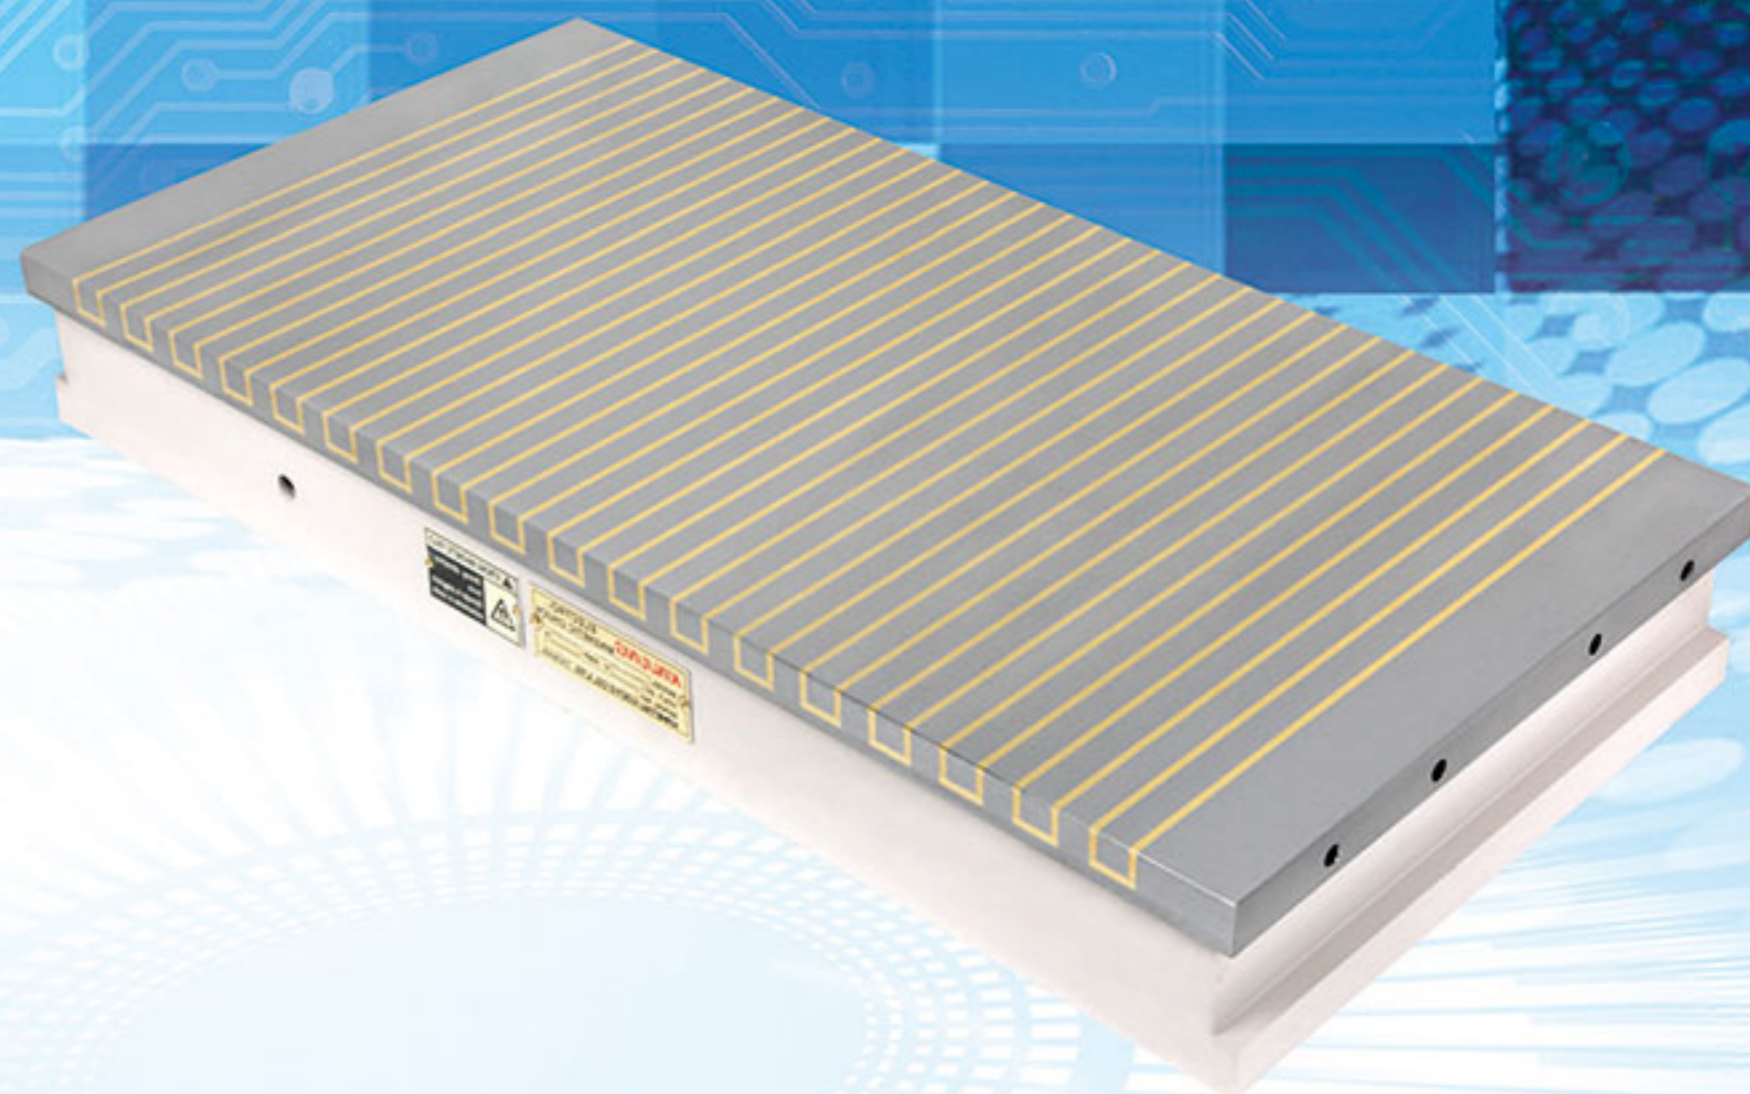

### 用途

最適合研削作業之標準型永電式夾盤。

### 特性

- 高剛性・高精度。
- 由於永電式夾盤之特性：短時間內完成充消磁，充磁後不需再供電，能夠達到省電效果，且夾盤本身不會產生溫升，因此，能夠進行高精度加工。

### Application

Suitable standard Electro-Permanent magnetic chuck of grinding operation.

### Features

- High rigidity with high precision..
- The character of the Electro-Permanent magnetic chuck is : Completing magnetization and demagnetization in a short time, and it does not need any power supply after magnetization, therefore it achieves a power saving. And because of a short time magnetization, the Electro-Permanent magnetic chuck does not have temperature rise, and then it enables to proceed precision machining.

### 規格表 Specification Table

型式 Model	尺寸 Nominal dimension	夾盤作業面 Chuckling face				磁極間格 pole pitch P	夾盤基準面 Chuck Mounting Part			高度 Heigh H	電壓 Voltage	重量 Weight
		B1	L1	t	Be		B2	L2	h			
KEPT-1530K	150x300	150	300	20	228	15(3+12)	140	300	20	80	DC220V	23Kg
KEPT-1535K	150x350	150	350	20	288	15(3+12)	140	350	20	80	DC220V	27Kg
KEPT-1540K	150x400	150	400	20	348	15(3+12)	140	400	20	80	DC220V	31Kg
KEPT-1545K	150x450	150	450	20	378	15(3+12)	140	450	20	80	DC220V	34Kg
KEPT-2040K	200x400	200	400	20	348	15(3+12)	190	400	20	80	DC220V	41Kg
KEPT-2045K	200x450	200	450	20	378	15(3+12)	190	450	20	80	DC220V	46Kg
KEPT-2050K	200x500	200	500	20	438	15(3+12)	190	500	20	80	DC220V	51Kg
KEPT-2550K	250x500	250	500	20	438	15(3+12)	240	500	20	80	DC220V	64Kg
KEPT-2560K	250x600	250	600	20	528	15(3+12)	240	600	20	80	DC220V	77Kg
KEPT-3060K	300x600	300	600	20	528	15(3+12)	290	600	20	80	DC220V	92Kg
KEPT-3070K	300x700	300	700	20	618	15(3+12)	290	700	20	80	DC220V	107Kg
KEPT-3090K	300x900	300	900	20	828	15(3+12)	290	900	20	80	DC220V	138Kg
KEPT-4060K	400x600	400	600	25	516	19(3+16)	390	600	20	80	DC220V	123Kg
KEPT-4070K	400x700	400	700	25	630	19(3+16)	390	700	20	80	DC220V	143Kg
KEPT-4080K	400x800	400	800	25	744	19(3+16)	390	800	20	80	DC220V	164Kg
KEPT-40100K	400x1000	400	1000	25	934	19(3+16)	390	1000	20	80	DC220V	204Kg
KEPT-50100K	500x1000	500	1000	25	934	19(3+16)	490	1000	20	80	DC220V	256Kg
KEPT-50120K	500x1200	500	1200	25	1124	19(3+16)	490	1200	20	80	DC220V	307Kg
KEPT-50150K	500x1500	500	1500	25	1428	19(3+16)	490	1500	20	80	DC220V	383Kg
KEPT-60100K	600x1000	600	1000	25	934	19(3+16)	590	1000	20	80	DC220V	307Kg
KEPT-60120K	600x1200	600	1200	25	1124	19(3+16)	590	1200	20	80	DC220V	368Kg
KEPT-60150K	600x1500	600	1500	25	1428	19(3+16)	590	1500	20	80	DC220V	460Kg

※除了上述外，其他尺寸可訂製  
Size other than the above are available upon request.

※鐘通工業股份有限公司保有隨技術發展而衍生修改的權利  
KANETSU KOGYO CO., LTD. Reserve the right to bring up any modification connected with the technological development.

