



Horizontal Micropitch Electro-Permanent Magnetic Chuck

KEPT-SL

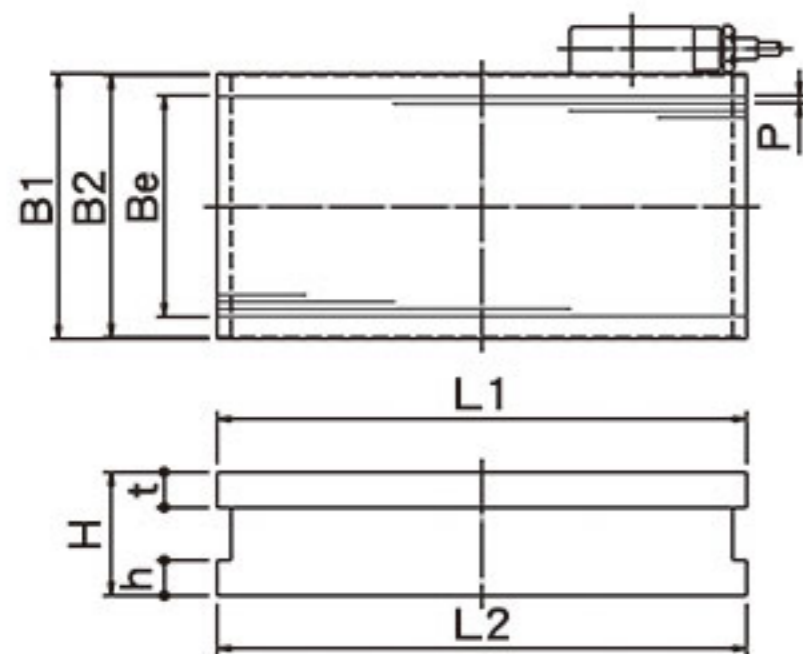

▲ 尺寸圖 Size Chart

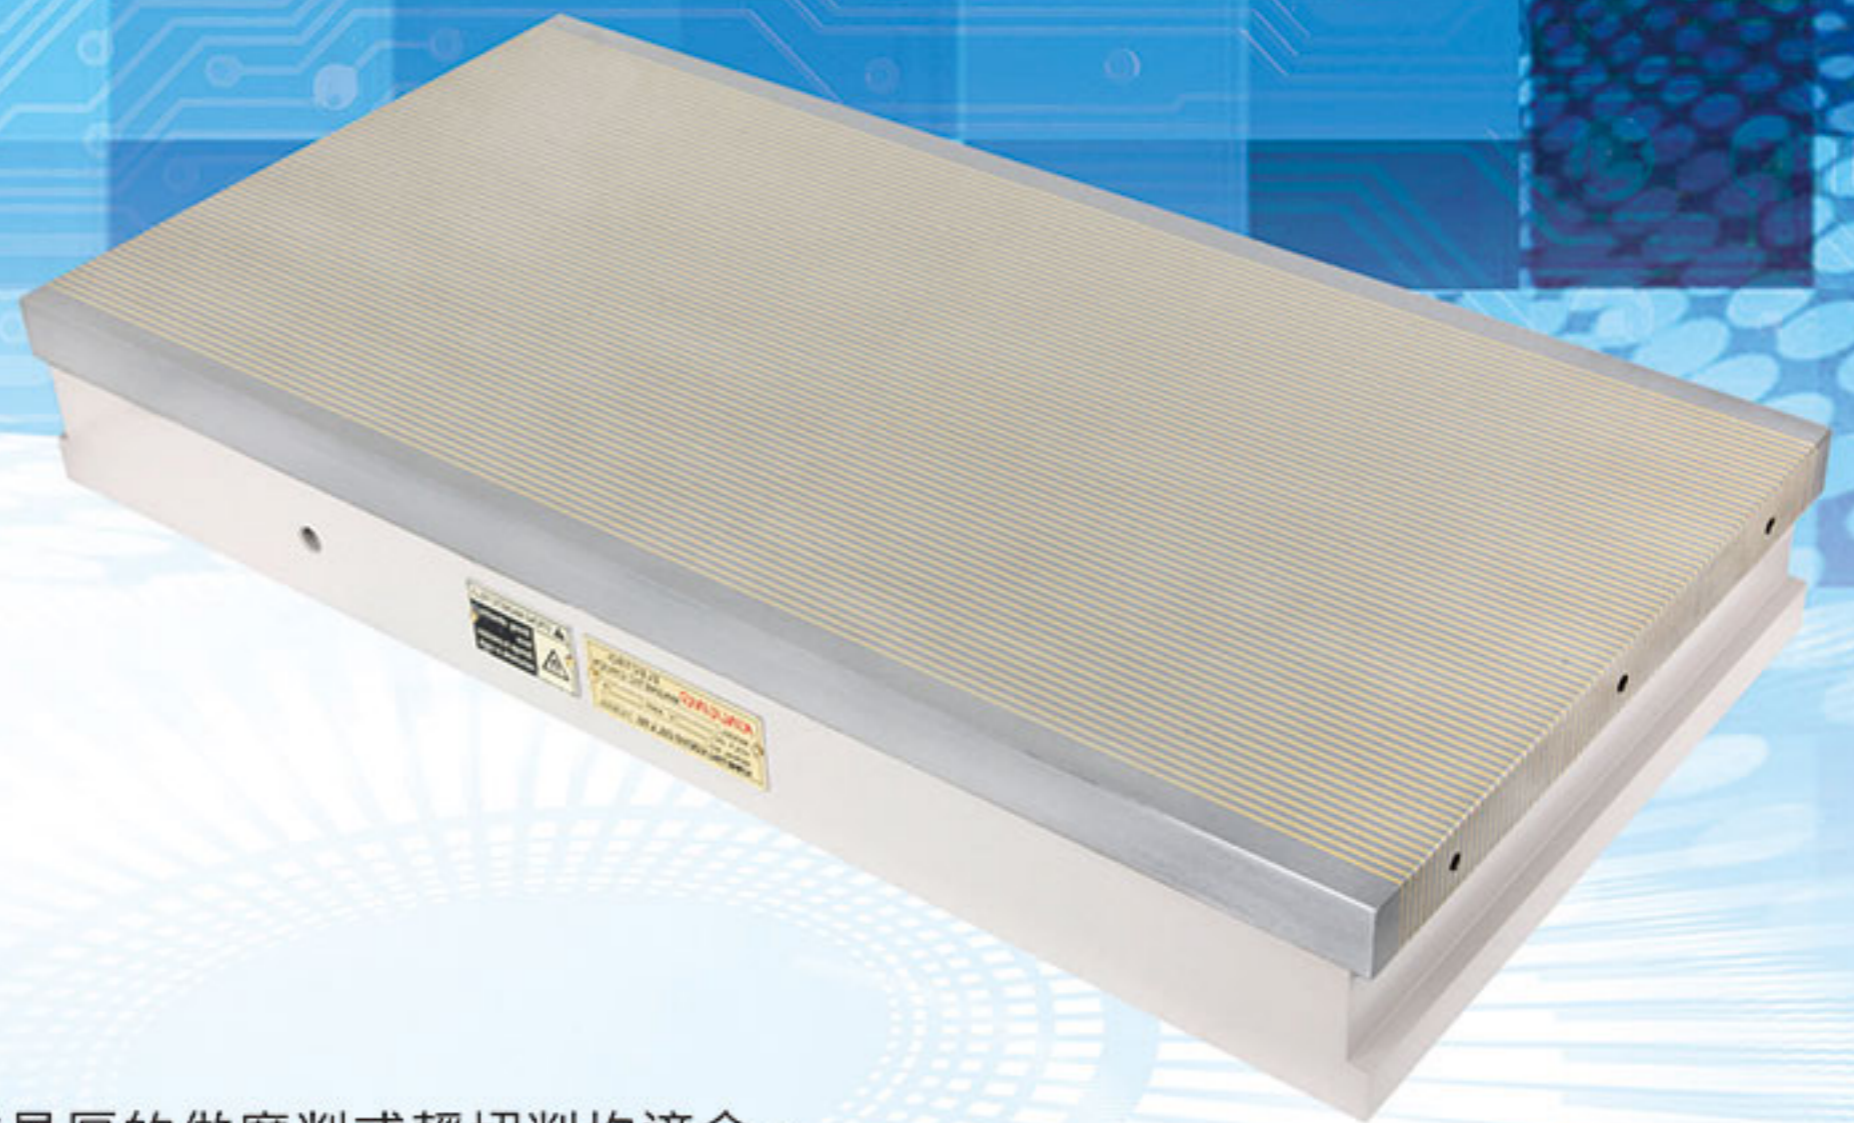

用途

- 此夾盤磁極走長邊方向。
- 本永電式夾盤用途廣泛，無論工件是薄型或是厚的做磨削或輕切削均適合。
- 尤其是對長的薄型工件的磨削或輕切削，以及拋光和砂輪磨光大量工件。

特性

- 夾盤作業面微距的磁極間隔，能牢固吸著薄而寬的工件。
- 由於永電式夾盤之特性：短時間內完成充消磁，充磁後不需再供電，能夠達到省電效果，且夾盤本身不會產生溫升，因此能夠進行高精度加工。

Application

Polar patterns are pitched in longitudinal direction on this chuck, The KEPT-SL is designed for widespread machining process such as grinding and light cutting of various types of work pieces, regardless of its thickness. It is suitable for grinding, light cutting, buffing and belt-grinding long and thin work pieces in a large lot.

Features

- Thanks to finer pole pitches on the chuck work face, these chucks hold thin and wide workpieces firmly.
- The character of the Electro-Permanent magnetic chuck is : Completing magnetization and demagnetization in a short time, and it does not need any power supply after magnetization, therefore it achieves a power saving. And because of a short time magnetization, the Electro-Permanent magnetic chuck does not have temperature rise, and then it enables to proceed precision machining.

規格表 Specification Table

型式 Model	尺寸 Nominal dimension	夾盤作業面 Chuckling face				磁極間格 pole pitch	夾盤基準面 Chuck Mounting Part			高度 Height	電壓 Voltage	重量 Weight
		B1	L1	t	Be		B2	L2	h			
KEPT-1530SL	150x300	150	300	20	125	4(1+3)	148	300	20	80	DC220V	27Kg
KEPT-1535SL	150x350	150	350	20	125	4(1+3)	148	350	20	80	DC220V	31Kg
KEPT-1545SL	150x450	150	450	20	125	4(1+3)	148	450	20	80	DC220V	40Kg
KEPT-2040SL	200x400	200	400	20	173	4(1+3)	198	400	20	80	DC220V	48Kg
KEPT-2045SL	200x450	200	450	20	173	4(1+3)	198	450	20	80	DC220V	54Kg
KEPT-2050SL	200x500	200	500	20	173	4(1+3)	198	500	20	80	DC220V	60Kg
KEPT-2060SL	200x600	200	600	20	173	4(1+3)	198	600	20	80	DC220V	72Kg
KEPT-2550SL	250x500	250	500	27	225	4(1+3)	248	500	20	80	DC220V	75Kg
KEPT-3060SL	300x600	300	600	27	273	4(1+3)	298	600	20	80	DC220V	108Kg
KEPT-3070SL	300x700	300	700	27	273	4(1+3)	298	700	20	80	DC220V	126Kg
KEPT-3090SL	300x900	300	900	27	273	4(1+3)	298	900	20	80	DC220V	162Kg
KEPT-4060SL	400x600	400	600	27	373	4(1+3)	398	600	20	80	DC220V	144Kg
KEPT-4080SL	400x800	400	800	27	373	4(1+3)	398	800	20	80	DC220V	192Kg

※除了上述外，其他尺寸可訂製
Size other than the above are available upon request.

※鐘通工業股份有限公司保有隨技術發展而衍生修改的權利
KANETSU KOGYO CO., LTD. Reserve the right to bring up any modification connected with the technological development.

