



# 橫向微距型電磁夾盤 Horizontal Micropitch Electro Magnetic Chuck



鐘通工業股份有限公司  
KANETSU KOGYO CO., LTD.

## KESL

電磁夾盤 Electro Magnetic Chuck

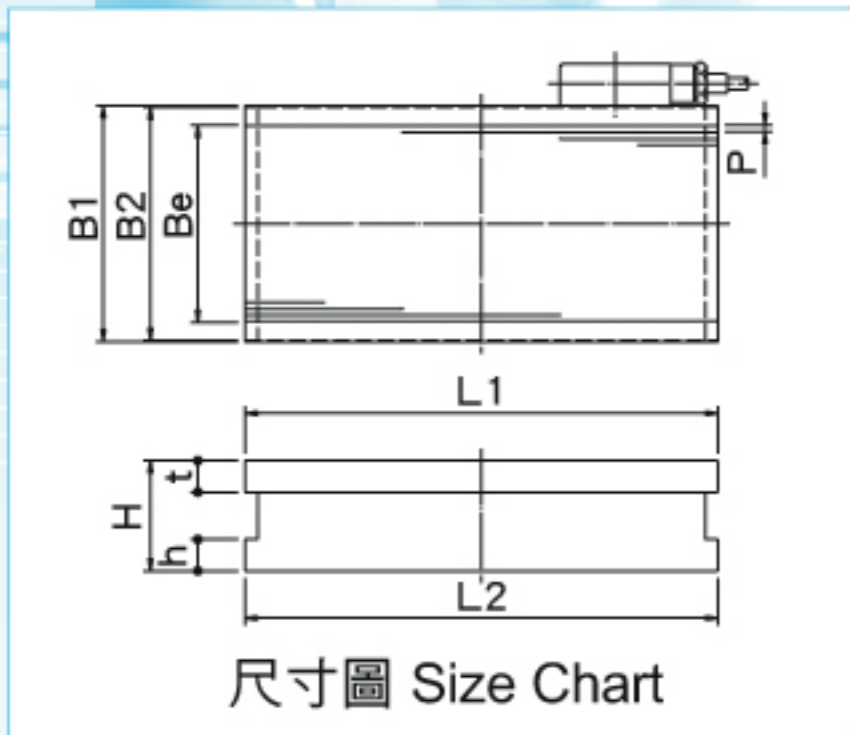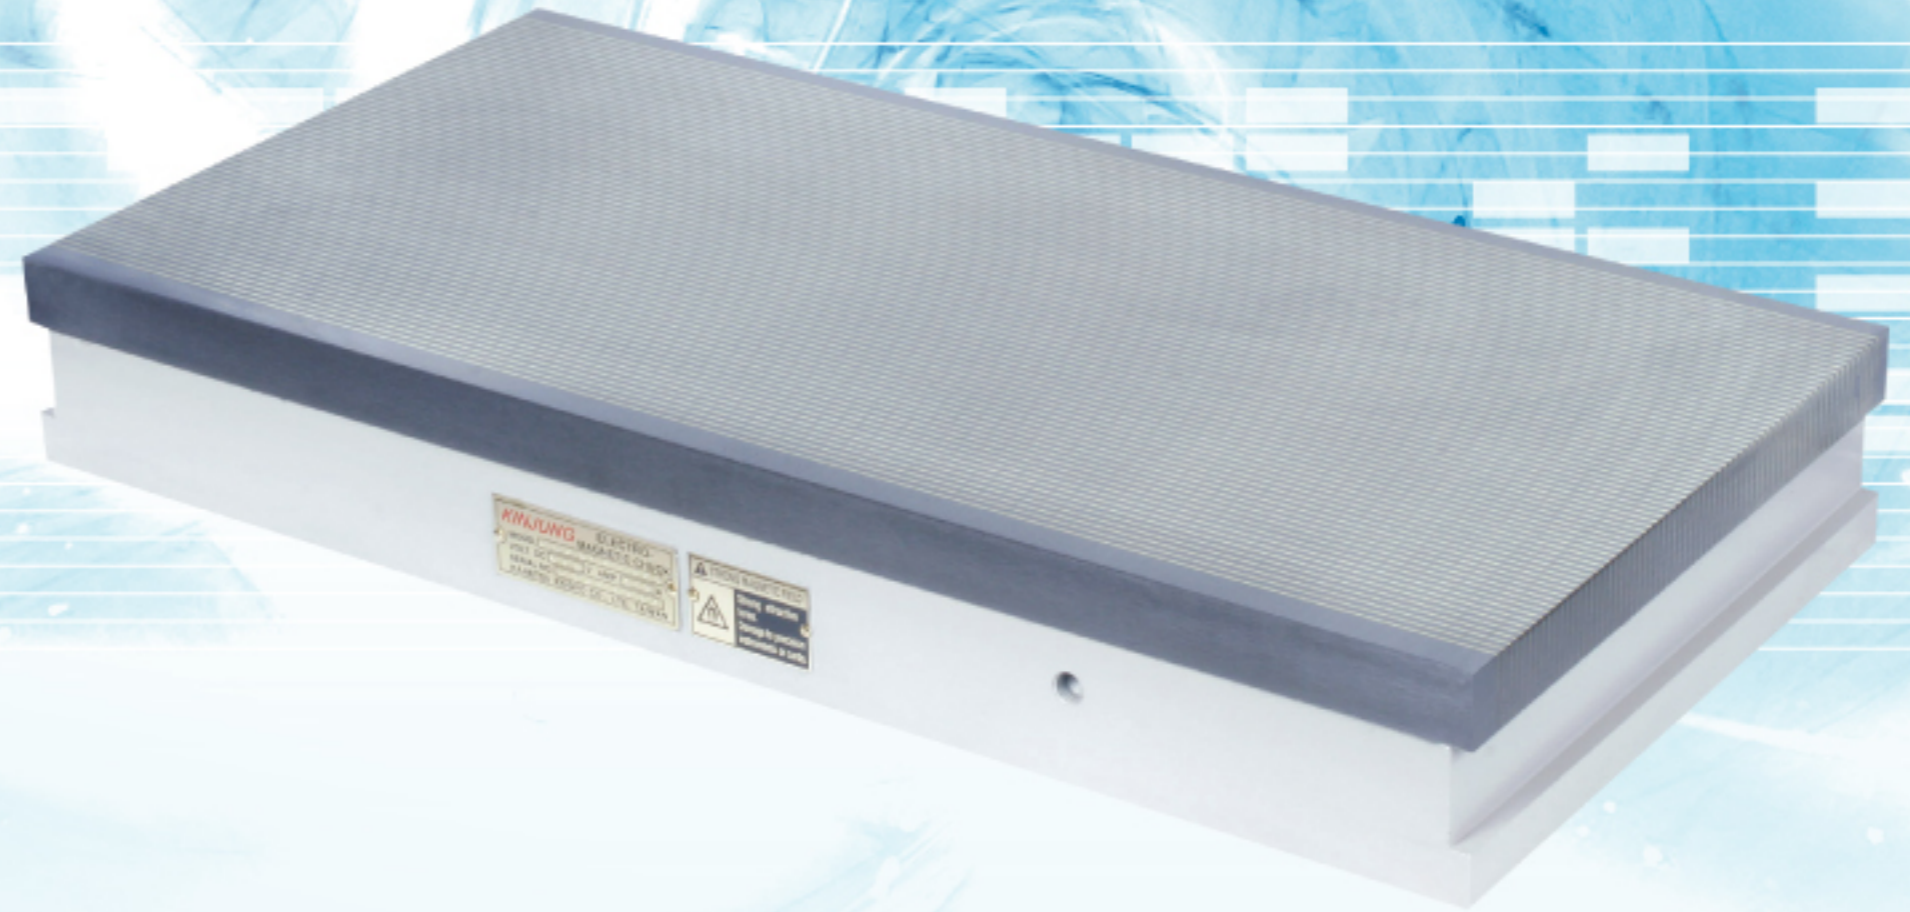

### 用途:

此夾盤之銅方向走長邊方向。本電磁夾盤用途廣泛，無論工件是薄形或是厚的作磨削或輕切削均適合。尤其是對長的薄形工件的磨削或輕切削，以及拋光和砂輪磨光大量工件。

### 特性:

- 磁力比標準的電磁夾盤多30%，在研磨及輕切削之加工能發揮其強磁力。
- 夾盤在無影響磁力範圍內，厚度盡可能做的輕薄，使工件能有較大的空間安置於磨床上。
- 剛性高，精度變化少。

### Application:

Polar patterns are pitched in longitudinal direction on this chuck. The KESL is designed for widespread machining process such as grinding and light cutting of various types of workpieces, regardless of its thickness. It is suitable for grinding, light cutting, buffing and belt-grinding long and thin work pieces in a large lot.

### Features:

- Magnetic force increases by 30%. That is compared to the standard electro magnetic chuck and the chuck shows high power in grinding and light cutting operations.
- The chuck is constructed as thin as possible without affecting its capability, resulting in more workpieces mounting space on the grinder.
- Because of its rigidity, it can minimize and maintain its quality and precision change.

### 規格表 Specification Table

型式 Model	尺寸 Nominal Dimension	夾盤作業面 Chucking Face				磁極間隔 Pole Pitch P	夾盤基準面 Chuck Mounting Part			高度 Height H	電壓 Voltage	電流 Current	重量 Weight
		B1	L1	t	Be		B2	L2	h				
KESL-1530	150×300	150	300	20	125	4(1+3)	148	300	20	70	DC115V	0.56A	19Kg
KESL-1535	150×350	150	350	20	125	4(1+3)	148	350	20	70	DC115V	0.72A	23Kg
KESL-1545	150×450	150	450	20	125	4(1+3)	148	450	20	70	DC115V	1.20A	29Kg
KESL-2040	200×400	200	400	20	173	4(1+3)	198	400	20	70	DC115V	0.68A	34Kg
KESL-2045	200×450	200	450	20	173	4(1+3)	198	450	20	70	DC115V	0.89A	38Kg
KESL-2050	200×500	200	500	20	173	4(1+3)	198	500	20	70	DC115V	1.10A	42Kg
KESL-2060	200×600	200	600	20	175	4(1+3)	198	600	20	70	DC115V	1.30A	51Kg
KESL-2550	250×500	250	500	27	225	4(1+3)	248	500	20	85	DC115V	1.36A	62Kg
KESL-3060	300×600	300	600	27	273	4(1+3)	298	600	20	85	DC115V	1.20A	98Kg
KESL-3070	300×700	300	700	27	273	4(1+3)	298	700	20	85	DC115V	1.50A	114Kg
KESL-3090	300×900	300	900	27	273	4(1+3)	298	900	20	85	DC115V	2.20A	146Kg
KESL-4060	400×600	400	600	27	373	4(1+3)	398	600	20	85	DC115V	1.75A	135Kg
KESL-4080	400×800	400	800	27	373	4(1+3)	398	800	20	85	DC115V	2.65A	180Kg

※除了上述外，尺寸可依需要訂做。

Size other than the above are available upon request.

※鐘通工業股份有限公司保有隨技術發展而衍生修改的權利。

KANETSU KOGYO CO., LTD. reserve the right to bring up any modification connected with the technological development.

