



標準型角形永磁夾盤 Standard Rectangular Permanent Magnetic Chuck

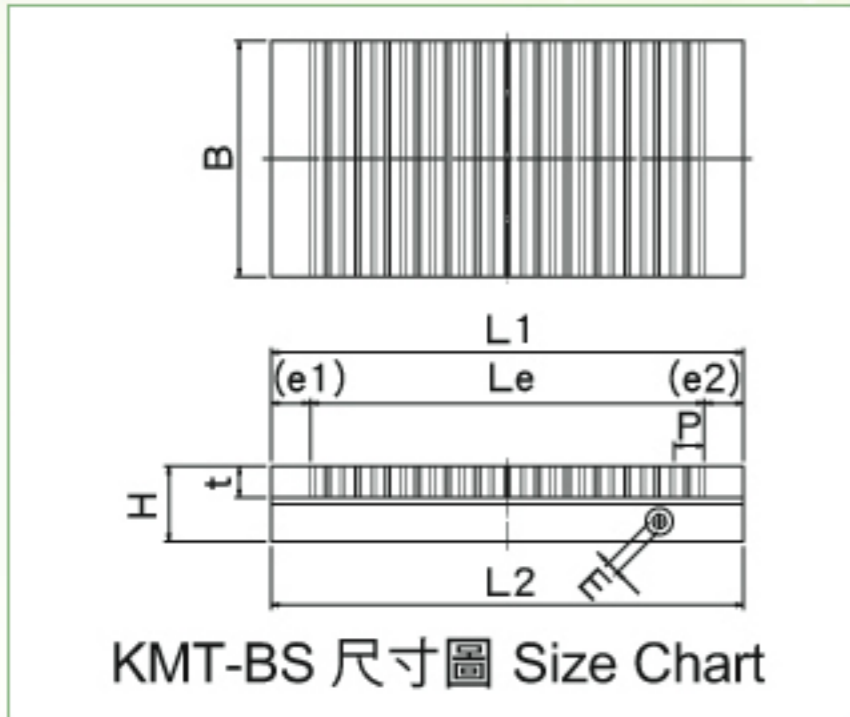

鐘通工業股份有限公司
KANETSU KOGYO CO., LTD.

KMT-B/KMT-BS

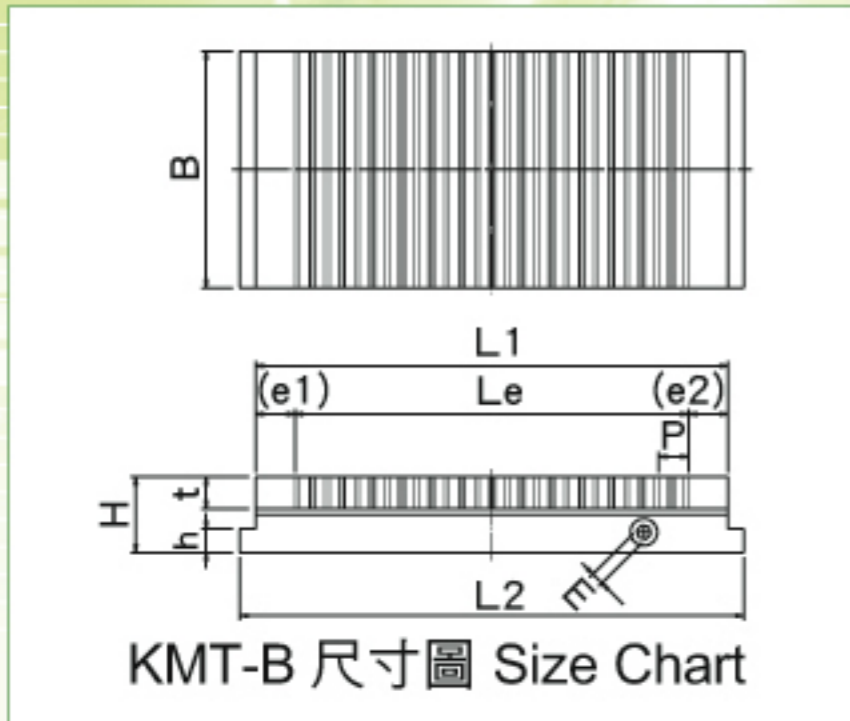

永磁夾盤
Permanent Magnetic Chuck

10

用途:

最適合磨削作業之標準型永磁夾盤。

特性:

- 手柄輕，操作容易。
- 有效磁力範圍面積增大。

Application:

It is suitable for grinding operation, of standard permanent magnetic chuck.

Features:

- Handle can be operated lightly.
- Magnetic effective area is enlarged.

規格表 Specification Table

mm

型式 Model	尺寸 Nominal Dimension	夾盤作業面 Chucking Face						磁極間隔 Pole Pitch	夾盤基準面 Chuck Mounting Part			高度 Height	六角孔 Hexagonal Handle hole	重量 Weight
		B	L1	Le	t	e1	e2	P	B	L2	h			
KMT-1018B	100×175	100	175	136	20	14	25	19(3+6+1+2+1+6)	100	195	15	48	8	6.5Kg
KMT-1025B	100×250	100	250	212	20	13	25	19(3+6+1+2+1+6)	100	270	15	48	8	8.0Kg
KMT-1030B	100×300	100	300	250	20	25	25	19(3+6+1+2+1+6)	100	320	15	48	8	10.0Kg
KMT-1325B	125×250	125	250	212	20	13.7	24.3	19(3+6+1+2+1+6)	125	270	15	48	8	10.5Kg
KMT-1515B	150×150	150	150	117	20	9	24	19(3+6+1+2+1+6)	150	170	15	48	8	7.5Kg
KMT-1530B	150×300	150	300	250	20	25	25	19(3+6+1+2+1+6)	150	320	15	48	8	16.0Kg
KMT-1535B	150×350	150	350	307	20	18.5	24.5	19(3+6+1+2+1+6)	150	370	15	48	8	18.5Kg
KMT-1540B	150×400	150	400	345	20	27.5	27.5	19(3+6+1+2+1+6)	150	420	15	48	8	21.5Kg
KMT-1545B	150×450	150	450	402	20	24	24	19(3+6+1+2+1+6)	150	470	15	48	8	25.0Kg
KMT-2035B	200×350	200	350	307	20	18.5	24.5	19(3+6+1+2+1+6)	200	370	15	48	8	25.0Kg
KMT-2040B	200×400	200	400	345	20	27.5	27.5	19(3+6+1+2+1+6)	200	420	15	48	8	29.5Kg
KMT-2045B	200×450	200	450	402	20	17	31	19(3+6+1+2+1+6)	200	470	15	48	8	32.5Kg
KMT-2050B	200×500	200	500	459	20	16.5	24.5	19(3+6+1+2+1+6)	200	520	15	48	8	36.5Kg
KMT-2060B	200×600	200	600	554	20	19.6	26.4	19(3+6+1+2+1+6)	200	620	15	48	8	44.0Kg
KMT-2550B	250×500	250	500	459	20	16.5	24.5	19(3+6+1+2+1+6)	250	520	15	48	8	46.0Kg
KMT-3060B	300×600	300	600	554	20	18.5	27.5	19(3+6+1+2+1+6)	300	620	15	48	8	66.5Kg
KMT-1010BS	100×100	100	100	600	20	15.2	24.8	19(3+6+1+2+1+6)	100	100	-	48	8	4.0Kg
KMT-1018BS	100×175	100	175	136	20	14	25	19(3+6+1+2+1+6)	100	175	-	48	8	7.0Kg
KMT-1515BS	150×150	150	150	117	20	9	24	19(3+6+1+2+1+6)	150	150	-	48	8	8.0Kg
KMT-1530BS	150×300	150	300	250	20	25	25	19(3+6+1+2+1+6)	150	300	-	48	8	17.0Kg

鐘通工業股份有限公司保有隨技術發展而衍生修改的權利。
KANETSU KOGYO CO., LTD. reserve the right to bring up any modification connected with the technological development.